

# DR132


Order method

DR132-25×50  
Product No. d D



**Features**

It has a shaft on the hub movable when assembled.  
It has a good capacity of transmission.  
Centering function is available.

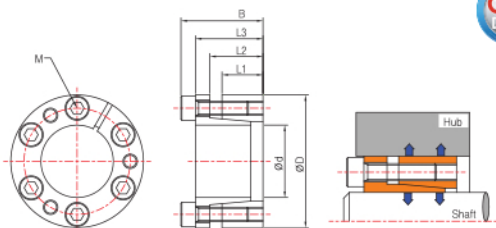

**Usage** : Gear, Pulley, Sprocket, Cam, etc.

**Specifications** : Surface roughness/Rt max 16µm  
Processing tolerance(Max)/Shaft h8, hub H8

DR132/DR133 d×D	Dimension					Tightening screw(DIN912/12.9)			
	D1(DR133 Only)	L1	L2	L3	B	Size	Quantity	DR132 Tightening torque	DR133 Tightening torque
mm	mm	mm	mm	mm	mm	M	Qty	N·m	N·m
18×47	56	17	22	28	34	M6	5	14	17
19×47	56	17	22	28	34	M6	5	14	17
20×47	56	17	22	28	34	M6	5	14	17
22×47	56	17	22	28	34	M6	5	14	17
24×50	59	17	22	28	34	M6	5	14	17
25×50	59	17	22	28	34	M6	6	14	17
28×55	64	17	22	28	34	M6	6	14	17
30×55	64	17	22	28	34	M6	6	14	17
32×60	69	17	22	28	34	M6	8	14	17
35×60	69	17	22	28	34	M6	8	14	17
38×65	74	17	22	28	34	M6	8	14	17
40×65	74	17	22	28	34	M6	8	14	17
42×75	84	20	25	33	41	M8	7	35	41
45×75	84	20	25	33	41	M8	7	35	41
48×80	89	20	25	33	41	M8	7	35	41
50×80	89	20	25	33	41	M8	7	35	41
55×85	94	20	25	33	41	M8	8	35	41
60×90	99	20	25	33	41	M8	8	35	41
65×95	104	20	25	33	41	M8	9	35	41
70×110	119	24	30	40	50	M10	8	70	83
75×115	124	24	30	40	50	M10	8	70	83
80×120	129	24	30	40	50	M10	8	70	83
85×125	134	24	30	40	50	M10	9	70	83
90×130	139	24	30	40	50	M10	9	70	83
95×135	144	24	30	40	50	M10	10	70	83
100×145	154	26	32	44	56	M12	8	125	145

LOCKING ELEMENT