

DR132A


Order method

DR132A-25×50
Product No. d D



Features

Available when the hub is moved to the shaft direction to some extent.
Centering function is available.

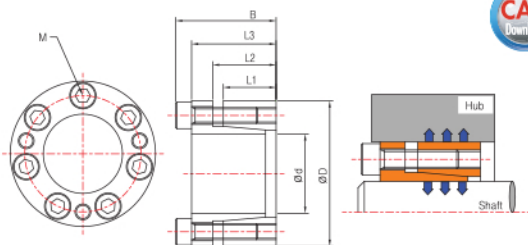

Usage : Sprocket, Gear, Cam, etc.

Specifications : Surface roughness/Rt max 16µm
Processing tolerance(Max)/Shaft h9, hub H9

DR132A d×D	Dimension				Tightening screw(DIN912/12.9)			Transfer		Surface pressure		Mass
	L1	L2	L3	B	Size	Quantity	Tightening torque	Thrust	Torque	Shaft	Hub	
mm	mm	mm	mm	mm	M	Qty	N · m	kN	N · m	Mpa	Mpa	kg
18×47	20	24	32	38	M6	6	16	31	295	299	97	0.33
19×47	20	24	32	38	M6	6	16	31	295	299	97	0.33
20×47	20	24	32	38	M6	6	16	31	305	283	97	0.32
22×47	20	24	32	38	M6	6	16	31	334	257	97	0.30
24×50	20	24	32	38	M6	7	16	39	461	295	113	0.35
25×50	20	24	32	38	M6	7	16	39	481	283	113	0.35
28×55	20	24	32	38	M6	7	16	39	540	253	103	0.40
30×55	20	24	32	38	M6	7	16	39	579	236	103	0.38
32×60	20	24	32	38	M6	9	16	46	736	265	113	0.45
35×60	20	24	32	38	M6	9	16	46	805	243	113	0.44
38×65	20	24	32	38	M6	9	16	46	873	223	104	0.50
40×65	20	24	32	38	M6	9	16	46	913	212	104	0.47
42×75	24	29	40	48	M8	9	39	85	1,776	313	140	0.90
45×75	24	29	40	48	M8	9	39	85	1,933	293	140	0.80
48×80	24	29	40	48	M8	9	39	85	2,031	274	131	0.90
50×80	24	29	40	48	M8	9	39	85	2,119	263	131	0.90
55×85	24	29	40	48	M8	10	39	99	2,718	279	144	0.90
60×90	24	29	40	48	M8	10	39	99	2,963	256	136	1.00
65×95	24	29	40	48	M8	12	39	113	3,669	270	147	1.10
70×110	30	37	52	62	M10	10	74	155	5,435	285	140	2.00
75×115	30	37	52	62	M10	10	74	155	5,828	265	133	2.20
80×120	30	37	52	62	M10	10	74	155	6,210	250	128	2.30
85×125	30	37	52	62	M10	12	74	177	7,544	268	141	2.40
90×130	30	37	52	62	M10	12	74	177	7,986	254	135	2.50
95×135	30	37	52	62	M10	14	74	246	10,536	300	162	2.70
100×145	39	46	64	74	M10	15	74	246	11,086	206	116	4.00

LOCKING ELEMENT