


DR133B

Order method **DR133B-25×50**
Product No. d D



Features

Precise position can be decided as the hub is not moved to the shaft direction.
Centering function is available.

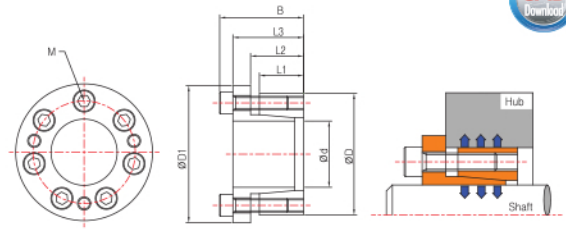

Usage : Gear, Pulley, Sprocket, Cam, etc.

Specifications : Surface roughness/Rt max 16µm
Processing tolerance(Max)/Shaft h9, hub H9

DR133B d×D	Dimension					Tightening screw (DIN912/12.9)			Transfer		Surface pressure		Mass
	D1	L1	L2	L3	B	Size	Quantity	Tightening torque	Thrust	Torque	Shaft	Hub	
mm	mm	mm	mm	mm	mm	M	Qty	N·m	kN	N·m	Mpa	Mpa	kg
19×47	53	20	24	32	38	M6	6	16	30	285	285	93	0.36
20×47	53	20	24	32	38	M6	6	16	30	295	270	93	0.36
22×47	53	20	24	32	38	M6	6	16	30	324	246	93	0.34
24×50	56	20	24	32	38	M6	7	16	34	412	262	101	0.38
25×50	56	20	24	32	38	M6	7	16	34	432	253	101	0.37
28×55	62	20	24	32	38	M6	7	16	34	471	225	93	0.44
30×55	62	20	24	32	38	M6	7	16	34	511	210	93	0.43
32×60	68	20	24	32	38	M6	9	16	44	697	253	108	0.51
35×60	68	20	24	32	38	M6	9	16	44	766	232	108	0.48
38×65	73	20	24	32	38	M6	9	16	44	834	213	98	0.55
40×65	73	20	24	32	38	M6	9	16	44	883	202	100	0.52
42×75	83	24	29	40	48	M8	9	39	81	1,698	299	133	0.96
45×75	83	24	29	40	48	M8	9	39	81	1,815	279	133	0.90
48×80	88	24	29	40	48	M8	9	39	81	1,943	262	125	1.01
50×80	88	24	29	40	48	M8	9	39	81	2,021	252	125	0.95
55×85	94	24	29	40	48	M8	10	39	90	2,473	253	130	1.06
60×90	99	24	29	40	48	M8	10	39	90	2,698	233	123	1.13
65×95	104	24	29	40	48	M8	12	39	108	3,503	258	140	1.22
70×110	119	30	37	52	62	M10	10	74	142	4,945	259	127	2.28
75×115	124	30	37	52	62	M10	10	74	142	5,298	242	121	2.40
80×120	129	30	37	52	62	M10	10	74	142	5,641	226	116	2.52
85×125	134	30	37	52	62	M10	12	74	167	7,201	255	134	2.66
90×130	139	30	37	52	62	M10	12	74	167	7,603	242	128	2.78
95×135	144	30	37	52	62	M10	14	74	197	9,369	267	144	2.98
100×145	154	39	46	64	74	M10	15	74	206	10,595	196	111	4.3

LOCKING ELEMENT