


DR134S


Order method

DR134S-13×27
Product No. d D

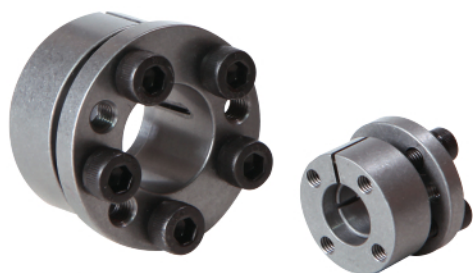

Features

Light weight and compact size.
Centering function is available.
Fitting and disassembly is easy.

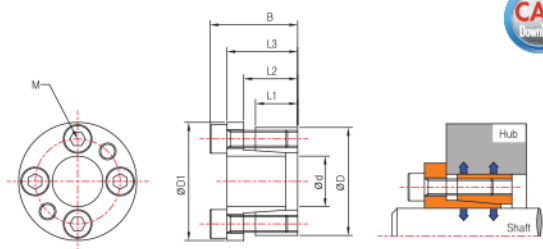

Usage : Pulley, Gear, Fly wheel, Lever, Cam, etc.

Specifications : Surface roughness / Rt max 16µm
Processing tolerance(Max)/Shaft h8, hub H8

DR134S d×D	Dimension					Tightening screw(DIN912/12.9)			Transfer		Surface pressure		Mass
	D1	L1	L2	L3	B	Size	Quantity	Tightening torque	Thrust	Torque	Shaft	Hub	
mm	mm	mm	mm	mm	mm	M	Qty	N · m	kN	N · m	Mpa	Mpa	kg
8×22	25	10	13	17	21	M4	3	4	5	18	274	70	0.05
9×23	26	10	13	17	21	M4	3	4	5	21	244	67	0.05
10×24	27	10	13	17	21	M4	4	4	6	30	295	86	0.05
11×25	28	10	13	17	21	M4	4	4	6	34	265	83	0.06
12×26	29	10	13	17	21	M4	5	4	8	47	304	99	0.06
13×27	30	10	13	17	21	M4	5	4	8	50	281	96	0.06
14×31	34	12.5	16	21	26	M5	4	8	10	69	261	86	0.10
15×32	35	12.5	16	21	26	M5	4	8	10	74	243	83	0.11
16×33	36	12.5	16	21	26	M5	4	8	10	79	228	80	0.11
17×34	37	12.5	16	21	26	M5	5	8	13	104	268	98	0.12
18×35	38	12.5	16	21	26	M5	5	8	13	108	253	95	0.12
19×35	38	12.5	16	21	26	M5	5	8	13	108	253	95	0.12

LOCKING ELEMENT