




Electroless nickel plating

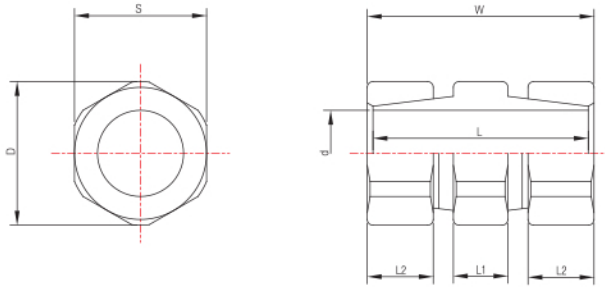

Features

- Simple lock by Nut tightening It can be installed in a narrow space Cost Savings because of tightening without key seat.
- High Tightening Torque and Allowable Thrust It is possible to supply with plating.
- In plated type, Tightening Torque and Allowable Thrust are reduced by 30%

Others

- Material : S45C, SUS304(Special order production type)
- Surface treatment : Phosphate Manganese coatings, Electroless nickel plating, Special order production type.

Product NO.	Dimension(mm)						Allowable Torque	Allowable Thrust	Tightening Thrust	Moment of Inertia	Mass
d	S	D	L1	L2	L	W	N · m	N	N · m	kg · m ²	g
DRN-6	12	13	5.5	5.5	20.5	21.5	7.8	833	11.8	4.24×10^{-8}	13
DRN-7	14	15	5.5	5.5	20.5	21.9	8.8	981	12.7	5.25×10^{-7}	17.5
DRN-8	14	15	6	6	21	23	9.8	1,128	13.7	8.25×10^{-7}	18
DRN-9	17	18.5	6.5	7	23.5	25.5	11.8	1,520	15.7	1.98×10^{-6}	30
DRN-10	17	18.5	7	7.5	25.4	27.4	15.7	1,804	19.6	2.08×10^{-6}	30
DRN-11	19	21	8	9	29	31	19.6	1,912	24.5	3.75×10^{-6}	43
DRN-12	19	21	8	9	30	32	37.3	2,010	29.4	3.75×10^{-6}	41
DRN-14	22	24.6	9	10	34	36	41.2	2,442	34.3	7.50×10^{-6}	60
DRN-15	23	25	9.5	11.5	37.5	39.5	49	2,942	39.2	1.00×10^{-5}	75
DRN-16	24	26	10	12	39	41	54.9	3,275	49	1.45×10^{-5}	100
DRN-17	26	28.5	11	12.5	41	43	60.8	3,687	53.9	1.93×10^{-5}	115
DRN-18	27	30	12	12.5	43	45	68.6	3,942	58.8	2.48×10^{-5}	130
DRN-19	29	32	12	13.5	45	47	75.5	4,364	63.7	3.25×10^{-5}	150
DRN-20	30	32.5	13	14.5	48	50	88.2	4,952	68.6	3.50×10^{-5}	160
DRN-22	32	35	14	15	50	52	103	5,491	78.4	5.00×10^{-5}	190
DRN-24	35	38.5	14	16	52	54	123	6,080	83.3	7.25×10^{-5}	230
DRN-25	36	40	15	17	55	57	157	7,159	88.2	9.00×10^{-5}	260
DRN-30	41	45	17	17	63	65	177	11,768	127	8.75×10^{-5}	350
DRN-35	46	51	19	19	69	71	206	11,768	167	1.55×10^{-4}	480