

Model PSL

Electronic Pressure Switches

Description

PSL sensing element has excellent temperature properties by adopting a self temperature compensation Glass on Titanium or Stainless 316L. It can control the system without any controller due to the output of 1 or 2 channel NPN open collector switch.

Features

- ▶ Electronic pressure switch with no mechanical moving part
- ▶ Fast response 1ms
- ▶ Measuring range 0~150MPa
- ▶ One or two pressure setting points
- ▶ Piezoresistive silicon cell
- ▶ Stainless steel 316L or Titanium Diaphragm

Applications

- ▶ Process control
- ▶ Hydraulics & Pneumatic
- ▶ Compressor Control
- ▶ Chillers
- ▶ Refrigeration Equipment


Specifications



	PSLU	PSLW
Range	0 ~ 20kPa ... 150MPa(Gauge) -100kPa ~ 0 ... 150MPa(Gauge) 0 ~ 100kPa ... 70MPa (Absolute)	
Performance		
Accuracy		±1%FS
Hysteresis	Hysteresis adjustable(2~10%)	3%FS
Thermal Effect on Zero		±0.1%FS/°C
Thermal Effect on Span		±0.1%FS/°C
Compensated Temperature Range		-10 ~ 70°C
Operating Temperature Range		-20 ~ 80°C
Electrical		
Excitation		11 ~ 28VDC
Output	1 Channel NPN Open Collector	2 Channel NPN Open Collector
Switch Load Current		28V 80mA Max.
Electrical Connection		Cable
Physical		
Proof Pressure		X1.5 or 150MPa, Whichever is less.
Burst Pressure		X2 or 150MPa, Whichever is less.
Vibration		49.1m/s ² {5G}, 10~500Hz
Shock		490m/s ² {50G}
Pressure port		R(PT)1/8", G(PF)1/8", R(PT)1/4", G(PF)1/4", R(PT)3/8", G(PF)3/8"
Media-Wetted Materials		Stainless Steel 304 / Titanium 87% or Stainless Steel 316L
Weight		Approx. 150g (include cable 100cm)


Dimension

► PSLW Type

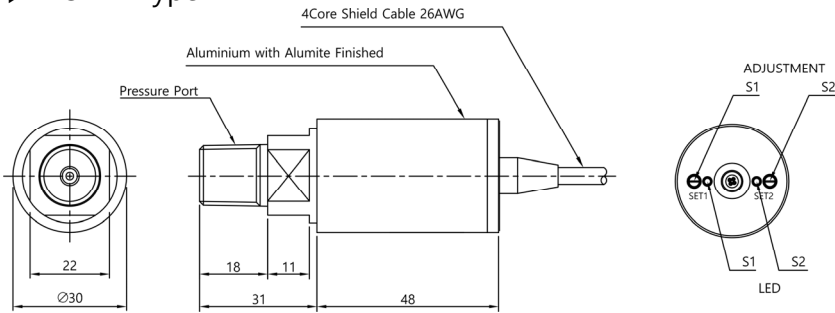

Wire Color	Connections
Red	Power ⊕
Black	Com. ⊖
Green	Switch 1
White	Switch 2
Shield	Earth


► PSLU Type

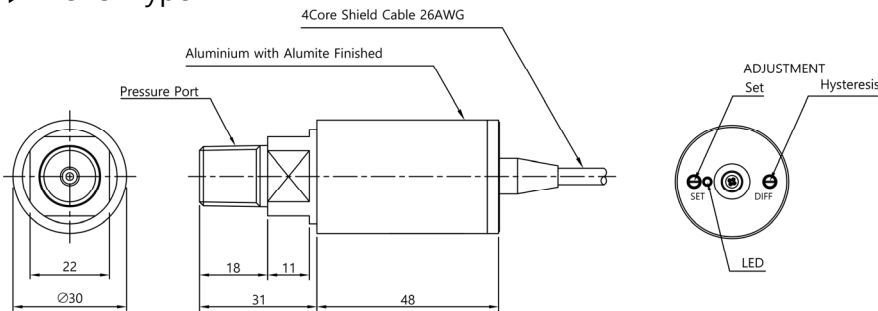


Wire Color	Connections
Red	Power ⊕
Black	Com. ⊖
Green	Switch
Shield	Earth

Circuit Diagram

► PSLW

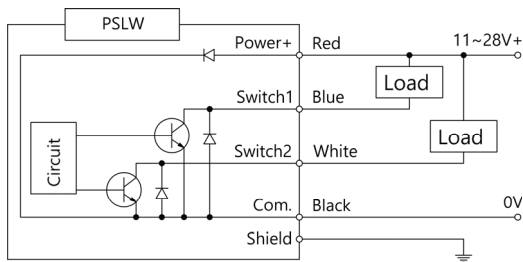

► PSLU

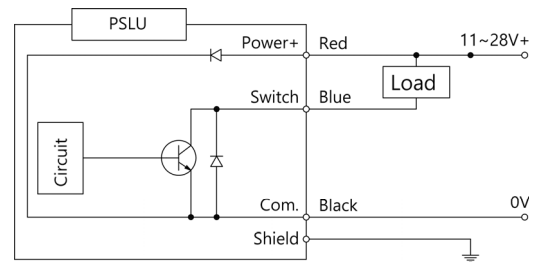

Ordering Information

Model Name		Type of Pressure Measurement	
PSL	U	0100	R A C G
Output	U : Switch 1, Hysteresis adjustable W : Switch 1,2		
Pressure Range	XXXX : Pressure CXXX : Compound Pressure		
Pressure Unit	R : kPa M : MPa B : bar K : kgf/cm ² P : psi H : mmHg C : cmH ₂ O		
		Connecting Methods	
		C : Cable	
		Pressure port	
		A : R(PT)3/8" D : G(PF)1/4"	
		B : G(PF)3/8" G : R(PT)1/8"	
		C : R(PT)1/4" H : G(PF)1/8"	